



## HALSTON DESIGNER SERIES

*Two-glass door merchandiser refrigerator*



### PRODUCT SPECIFICATION

Model	Doors	Capacity (cu.ft)	Shelves	Cabinet Dimensions (Inches / mm)			HP	Voltage	Amps	Cord Length (ft.)	Net Weight (lbs. / kg)
				L	D	H					
UNI-GDM-51R	2 (HINGED)	31	8	51" 1295	27.4" 695	78.9" 2005	1/3	110V/60Hz	6.50	6	290 131
UNI-GDM-51RS	2 (SLIDING)	31	8	51" 1295	27.4" 695	78.9" 2005	1/3	110V/60Hz	6.50	6	290 131




In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
Energy Efficiency  
Compliant

## STANDARD FEATURES

- Refrigeration system is optimized to function between 33 °F ~ 40 °F
- Black or white coated steel for exterior and white coated steel for interior
- High quality digital temperature controller
- With caster and brakes
- Bottom mounted compressor unit
- LED light inside top and two sides
- Double glazed safety glass with heated film inside
- Automatic defrost system
- R290 Refrigerant, O-zone friendly
- ETL approved (conforms to UL-471&NSF-7)
- DOE 2017, Energy efficient compliant

## Plan view

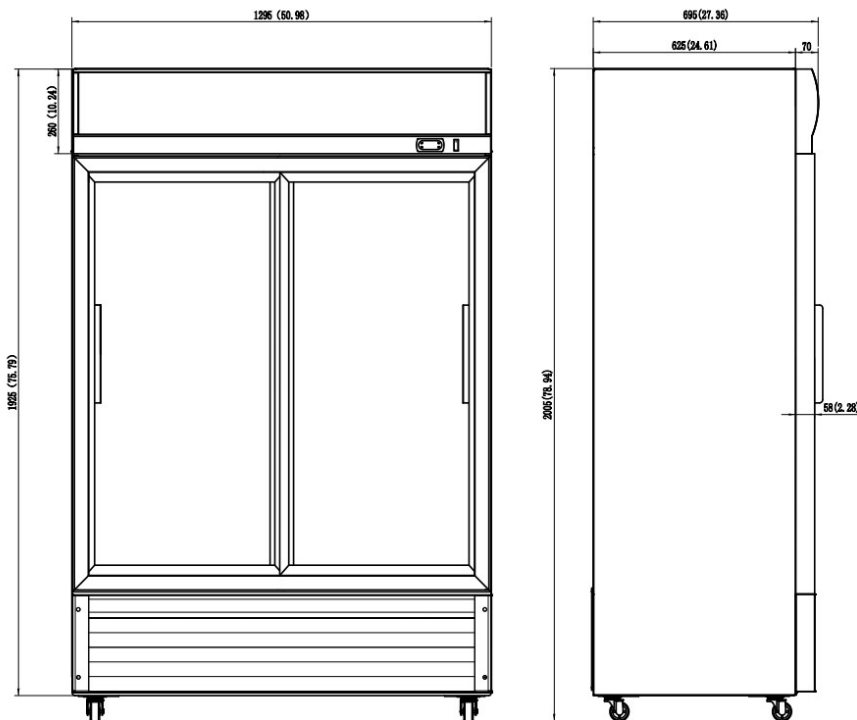

Direct Phone & Services: (516) 527-3309 . (888) 443-7014. [info@unisourcefoodequipment.com](mailto:info@unisourcefoodequipment.com) . unisourcefoodequipment.com

170 Wilbur Place, Suite 300, Bohemia, New York, 11716