



## HALSTON DESIGNER SERIES REFRIGERATED COMBO DISPLAY CASES

## **Standard Features:**

ENERG

rechnolog

- Four Adjustable Shelves With LED Lights.
- Two Cut-Away End Panels With Mirror Inside Lower Section.
- Two Clear Glass Rear Sliding Doors.
- Top Curved Double Pane Glass With Lift-Up or Fixed Front Glass. Includes With Heater.
- Adjustable Legs With Casters.
- Four Ft. Power Cord.

## **Additional Features For Refrigeration Units**

- Fan Cooling Refrigeration System.
- High Quality Digital Temperature Controller.
- Condensate Pan With Drawer System.
- Automatic Defrost System.
- CFC-Free R-290 Refrigerant.
- Range Of Temperature: 36° 40° F.




Model	Doors	Capacity (Cu. Ft)	Shelves	Cabinet Dimensions				Veltere	Amno	Wt.
				L	D	Н	HP	Voltage	Amps	(lbs)
REFRIGERATED DISPLAYS										
UNI-DS-900 UNI-DS-900-NLG*	2	17.6	2	35.8"	33.7"	57.5"	1/3	110V/60Hz	6.20	518
UNI-DS-1200 UNI-DS-1200-NLG*	2	22.9	2	47.6"	33.7"	57.5"	1/2	110V/60Hz	7.0	617
UNI-DS-1500 UNI-DS-1500-NLG*	2	26.5	2	59.5"	33.7"	57.5"	1/2	110V/60Hz	7.0	732

\* -NLG Series has non-lifting front glass





## HALSTON DESIGNER SERIES REFRIGERATED COMBO DISPLAY CASES

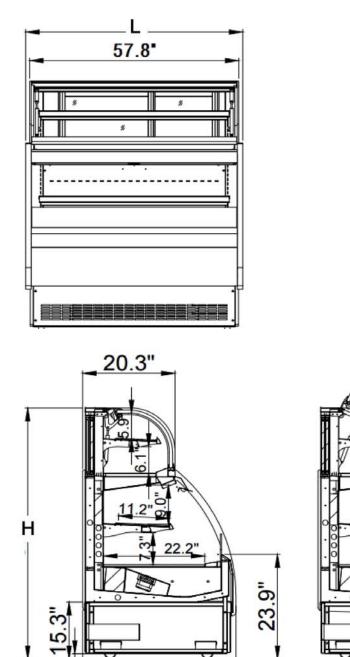

n

c

**Unit Shown With Optional Lift Glass** 

62.5"

Direct Phone & Service: (516) 527-3309 • (888) 443-7014 • info@unisourcefoodequipment.com • unisourcefoodequipment.com 170 Wilbur Place, Suite 300, Bohemia, New York, 11716

BAKERY AID INNOVATION™ is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice. © BAKERY AID INNOVATION™ ™ is a Trademark of Unisource Food Equipment, JUNE 2020