



Bakery Aid™

Innovation

By Unisource



HALSTON DESIGNER SERIES

“G960” DISPLAY CASES WITH CURVED FRONT

REFRIGERATED & NON-REFRIGERATED STYLES



STANDARD DISPLAY
UNI-G960A/ UNI-G960A-NR



LARGE DISPLAY
UNI-G960W/ UNI-G960W-NR

**LIFT-FRONT
GLASS
AVAILABLE**

Standard Features:

- Three Adjustable Lighted Shelves
- Two Glass End Panels
- Clear Glass Rear Sliding Doors
- Led Top Light And Shelf Lights & 8 Ft. Cord.
- Curved Double Pane Lift-Up or Fixed Front Glass
- Adjustable Legs With Casters
- Movable Shelves & Shelf Brackets

Additional Features For Refrigeration Units

- Fan Cooling Refrigeration System
- High Quality Digital Temperature Controller
- Sliding Out Condensing Unit For Easy Maintenance
- Automatic Defrost System
- CFC-Free R-134A Refrigerant
- Range Of Temperature: 41° F.

Model	Doors	Capacity		Shelves	Cabinet Dimensions			HP	Voltage	Amps	Wt. (lbs)
					L	D	H				
REFRIGERATED DISPLAYS											
UNI-G960A UNI-G960A-NLG*	2	18"x12"	18"x9"	3	70 3/4"	37 3/8"	54"	1/2	110V/60Hz	8.50	793
		18 Pcs (3x5+3)	24 Pcs (3x7+3)								
UNI-G960W UNI-G960W-NLG*	2	16 Pans		3	77 1/2"	42"	54"	1/2	110V/60Hz	9.20	815
NON-REFRIGERATED DISPLAYS											
UNI-G960A-NR UNI-G960A-NR-NLG*	2	18"x12"	18"x9"	3	70 3/4"	37 3/8"	54"	-	110V/60Hz	.55	639
		18 Pcs (3x5+3)	24 Pcs (3x7+3)								
UNI-G960W-NR UNI-G960W-NR-NLG*	2	16 Pans		3	77 1/2"	42"	54"	-	110V/60Hz	.55	661

* -NLG Series has non-lifting front glass



HALSTON DESIGNER SERIES

“G960” DISPLAY CASES WITH CURVED FRONT

REFRIGERATED & NON-REFRIGERATED STYLES


Optional 24 Hour Monitoring System

Receive Wifi alerts detected from the display case! Be aware before its to late and losing perishable foods.


- Model: UNI-CDP-210**
- 3 temperature Sensors
 - 8.5" x 4.7" x 4.1"
 - 115V/60Hz.



STANDARD DISPLAY UNI-G960A/UNI-G960A-NR

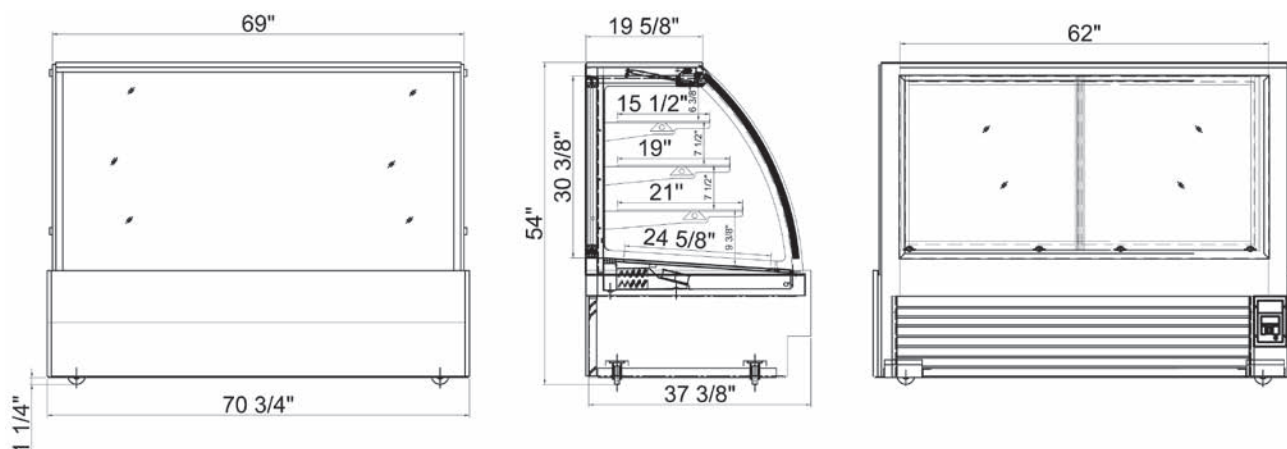

LARGE DISPLAY UNI-G960W/UNI-G960W-NR

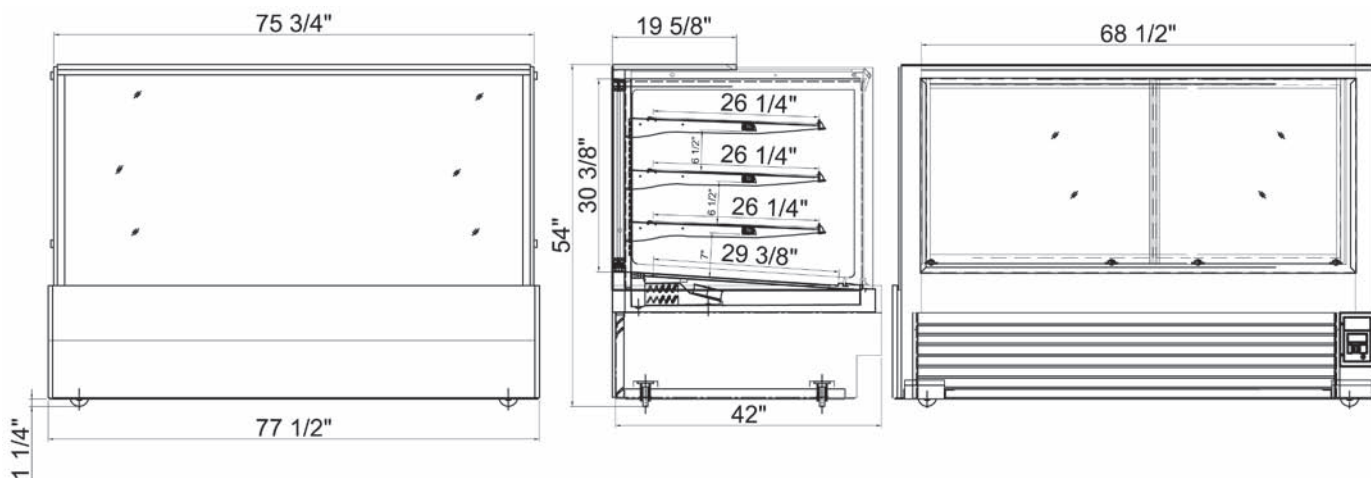

Direct Phone & Service: (516) 527-3309 • (888) 443-7014 • info@unisourcefoodequipment.com • unisourcefoodequipment.com
170 Wilbur Place, Suite 300, Bohemia, New York, 11716