



HALSTON DESIGNER SERIES

Flat glass refrigerated display case



PRODUCT SPECIFICATION

Model	Doors	Capacity (cu.ft)	Shelves	Cabinet Dimensions (Inches / mm)			HP	Voltage	Amps	Cord Length (ft.)	Net Weight (lbs. / kg)
				L	D	H					
UNI-RT4F	2	19	4	47.2" 1295	29.5" 750	54" 1350	1/3	110V/60Hz	4.90	6	290 131
UNI-RT5F	2	22.7	4	59" 1500	29.5" 750	54" 1350	1/3	110V/60Hz	6.20	6	290 131
UNI-RT6F	2	26.8	4	70.8" 1800	29.5" 750	54" 1350	3/5	110V/60Hz	6.80	6	




In Accordance with
AHRI Std 1200

DOE 2017
Energy Efficiency
Compliant

STANDARD FEATURES

- Refrigeration system is optimized to function between 33 °F ~ 40 °F
- Black or white coated steel for exterior and white coated steel for interior
- High quality digital temperature controller
- With caster and brakes
- Bottom mounted compressor unit
- LED light inside top and two sides
- Double glazed safety glass with heated film inside
- Automatic defrost system
- R290 Refrigerant, O-zone friendly
- ETL approved (conforms to UL-471&NSF-7)
- DOE 2017, Energy efficient compliant

Plan view

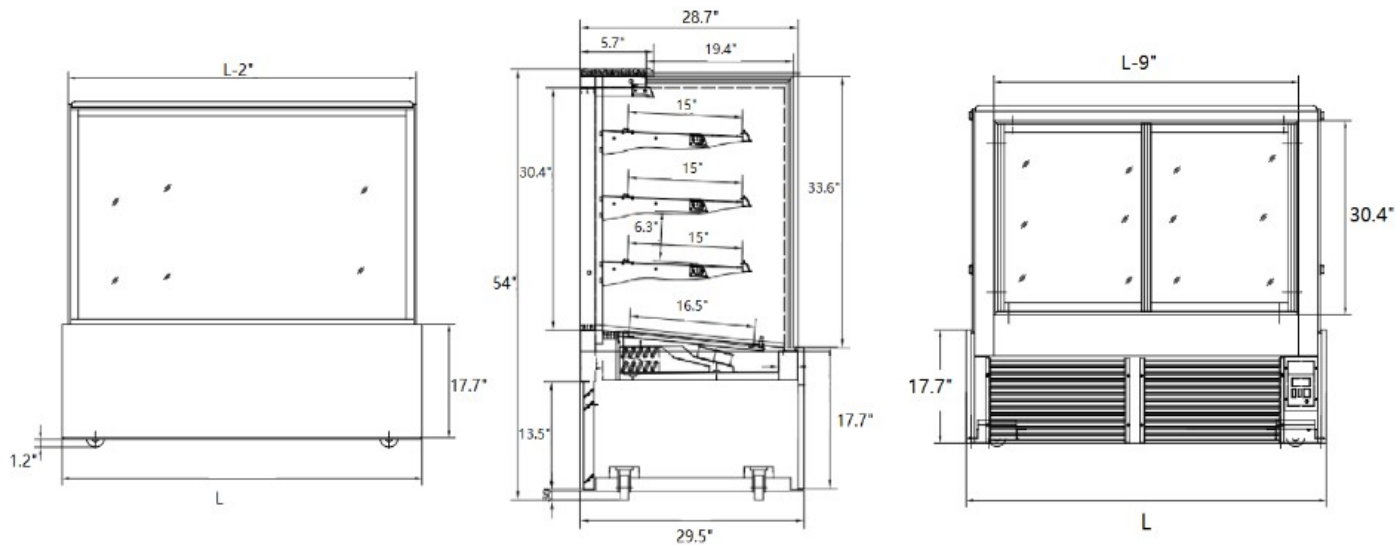

Direct Phone & Services: (516) 527-3309 . (888) 443-7014. info@unisourcefoodequipment.com . unisourcefoodequipment.com

170 Wilbur Place, Suite 300, Bohemia, New York, 11716