νιξιοΝ

Orange 621 i 6 Pan Full Size





UNIQUE BENEFITS



Vision Perfect Cooking

Make your diners great reason to keep returning to your place. With Retigo Vision combi ovens, you have the peace of mind that you will always achieve outstanding cooking results. The prepared foods have a perfect colour, are juicy, crispy and healthy with a minimal fat contain.



Vision Design

Simply keeps you cooking with ease and comfort. Experience an excellent combination of features, exceptional ergonomics and attractive appearance. All this with a focus on safety, hygiene and long time reliability.



Vision Controls

Gives you time to concentrate on cooking and things that really matter to you. The simpliest controls on the market will save you time and enable you to quickly and easily make all the necessary settings. Panel response is perfect even with grease or gloved hands.



Smart Investment

Generates money on savings for you every day. In-buil heat exchanger, tripple glazed door glass, 2" thick thermoinsulation combined with low consumption automatic cleaning will ensure you great return on investment.



516 527-3309 170 Wilbur Place, Suite 300 Bohemia, NY 11716 unisourcefoodequipment.com

Certified by:













NSF/ANSI 4

* DVGW and WRAS certificates are valid for models with retractable hand shower only.

DVGW CERT Anschlusssicher W 540

FEATURES & BENEFITS

Cooking

- Hot air 86 572 °F
- Combination 86 572 °F
- Steaming 86 266 °F
- Bio steaming 86 208 °F
- Over night cooking Saves time and money.
- Advanced steam generation system Two-step water preheating with in-built heat exchanger for perfect steam cooking results.
- Crosswise racks Safer and comfortable pans handling. Better product visual control.
- **Regeneration/banqueting** Cook, chill and regenerate to serve more diners in shorther times.
- Low temperature cooking Benefit from less weight loss, better taste.
- Automatic preheating/cooling minimises the loading temperature drop. Start cooking with the desired temperature.

Vision Controls

- **Touch panel** Fast controls covered by high protective foil . Gives immediate reaction on commands, makes panel seamless and easy to clean.
- Continuous cooking time option Saves your time during busy operations.
- Automatic start The ability to schedule a delayed start.

Other equipment

- Active Cleaning Low-cost automatic cleaning. No chef's time spent on cleaning any more.
- Tripple glazed door glass Advanced energy savings and external glass that does not burn you.
- **7 Fan speeds** Precise control of air distribution for desired results with different products.
- Automatic Fan stop No scalding when the door opened quickly.
- Auto-reversing fan Excellent evenness to deliver high product color and texture uniformity.
- Massive door handle Comfortable and safe handling with silver ion material contain for bacteria reduction.
- AISI 304 and 316 stainless steel Exceptional quality with a special coating for a extended life time.
- Hygienic cooking chamber with round inner corners Trouble free maintenance.
- Run-off tray under the door No slipping on wet floor.
- Two water inlets Saves a water treatment unit's capacity.
- WSS (Water Saving System) Special drain system & in-built heat exchanger to save water related cost.
- Removable pans holders with 2.9" spacing

Conectivity

- USB plug-in Transfer useful data easily to and from the combi oven.
- VisionCombi software Program and pictogram management in your PC, HACCP data view.

Operation logs

- HACCP records Easy and immediate analysis of critical cooking points.
- Complete operating records

Service

SDS (Service Diagnostic System) – Easy unit check up and trouble shooting.

Unit options

• Safety door opening in two steps

Optional accessories

ST 621/1021 stand with 7 x Half-size & 7 x Full-size racks ST 621/1021 FP flat pack stand with 7 x Half-size & 7 x Full-size racks Cleaning chemicals



516 527-3309 170 Wilbur Place, Suite 300 Bohemia, NY 11716 unisourcefoodequipment.com

TECHNICAL DATA

Model	O 621 i
Technical specification	2E0621IA
Heat source	Electricity
Steam generator	Advanced injection (Boilerless)
Capacity	7 x Full-size or 14 x Half-size cooking pans
Capacity of meals	100 - 300 meals per cooking cycle
Spacing	2.9"
Dimensions (w x h x d)	44.1" x 32.6" x 40.1"
Weight	333 lbs
Total power	15.3 kW
Heat power	14.7 kW
Fuse	45 A
Voltage	3~/208 V/50-60Hz
Noise level	max. 70 dBA
Water/Drain connection	G ³ /4" / 2"
Temperature	86 – 572 °F


STACKING OPTIONS

Lower unit	Upper unit
621	621
621	621 ig
1021	621

OPTIONAL VOLTAGE

3~/240 V/50-60Hz

DRAWINGS

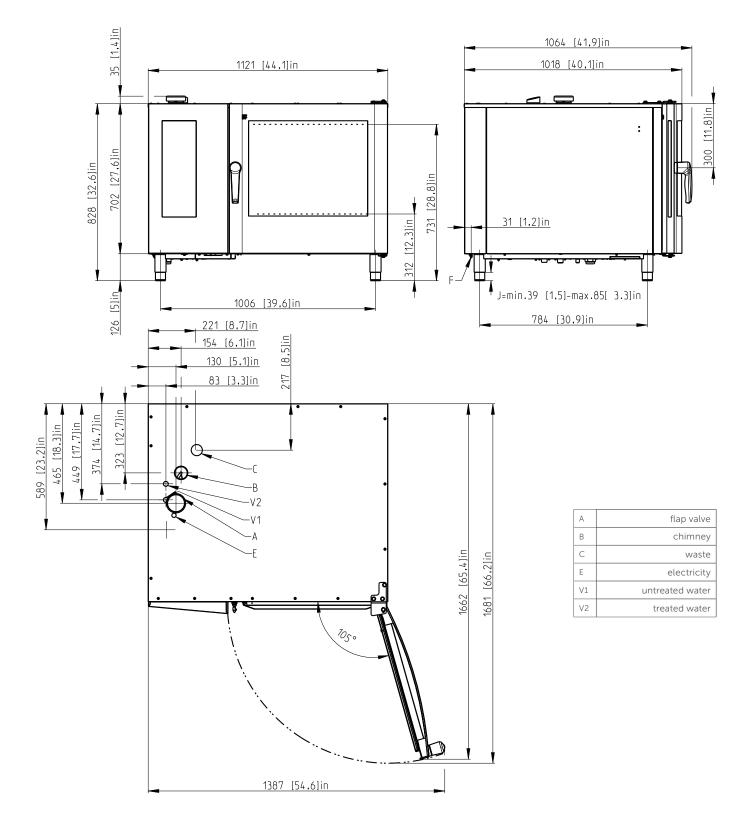



516 527-3309 170 Wilbur Place, Suite 300 Bohemia, NY 11716 unisourcefoodequipment.com