




INTRODUCING KnockDown Style Aluminum Bun Pan Racks

Features:

- Six cylindrical support bars provide strength and durability.
- 3" shelf spacing.
- Plastic endcaps, 1 1/2" ribbed angles, heavy duty 5" stem bolted swivel casters.
- Front load pan rack holds [20] 18" x 26" pans or [40] 18" x 13" pans. Side load pan rack holds [20] 18" x 26" pans.
- 500 lb. capacity. Units shipped K.D.
- Fully welded 1" square tubing ladder assembly. Angles are 1" x 1 1/2" x 20" on front load pan rack and 1" x 1 1/2" x 17 3/4" on side load pan rack.
- 6063-T52 extruded aluminum angles, upright tubing, and support pieces.

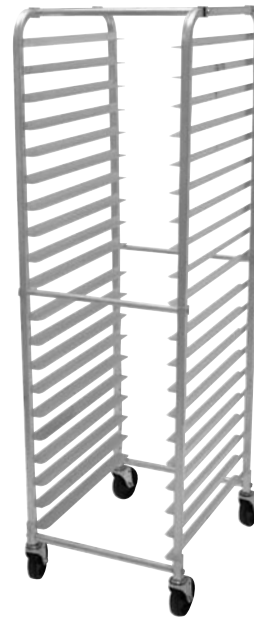


Front Load




Side Load

MODEL	Pan Loading	Pan Capacity	A Shelf Spacing	Overall Size L x W x H	Weight
PR10-3K	Front Load	10 Full Size	3"	20 1/4" x 26" x 38 1/4"	14 lbs.
PR12-5K	Front Load	12 Full Size	5"	20 1/4" x 26" x 69 1/4"	24 lbs.
PR18-3K	Front Load	18 Full Size	3"	20 1/4" x 26" x 63 1/4"	31 lbs.
PR20-3K	Front Load	20 Full or 40 Half Size	3"	20 1/4" x 26" x 69 1/4"	33 lbs.
PR30-2K	Front Load	30 Full Size	2"	20 1/4" x 26" x 69 1/4"	39 lbs.
PR18-3KS	Side Load	18 Full Size	3"	28 1/4" x 18" x 63 1/4"	31 lbs.
PR20-3KS	Side Load	20 Full Size	3"	28 1/4" x 18" x 69 1/4"	27 lbs.

Front Load Series

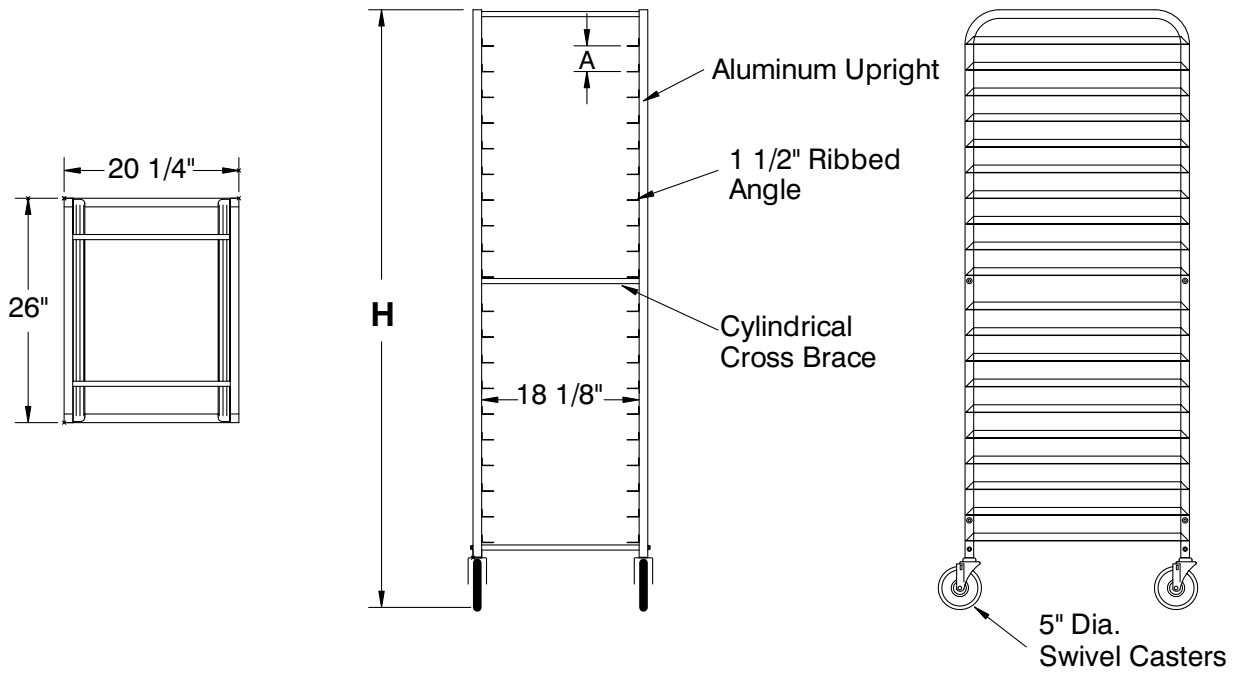

Side Load Series

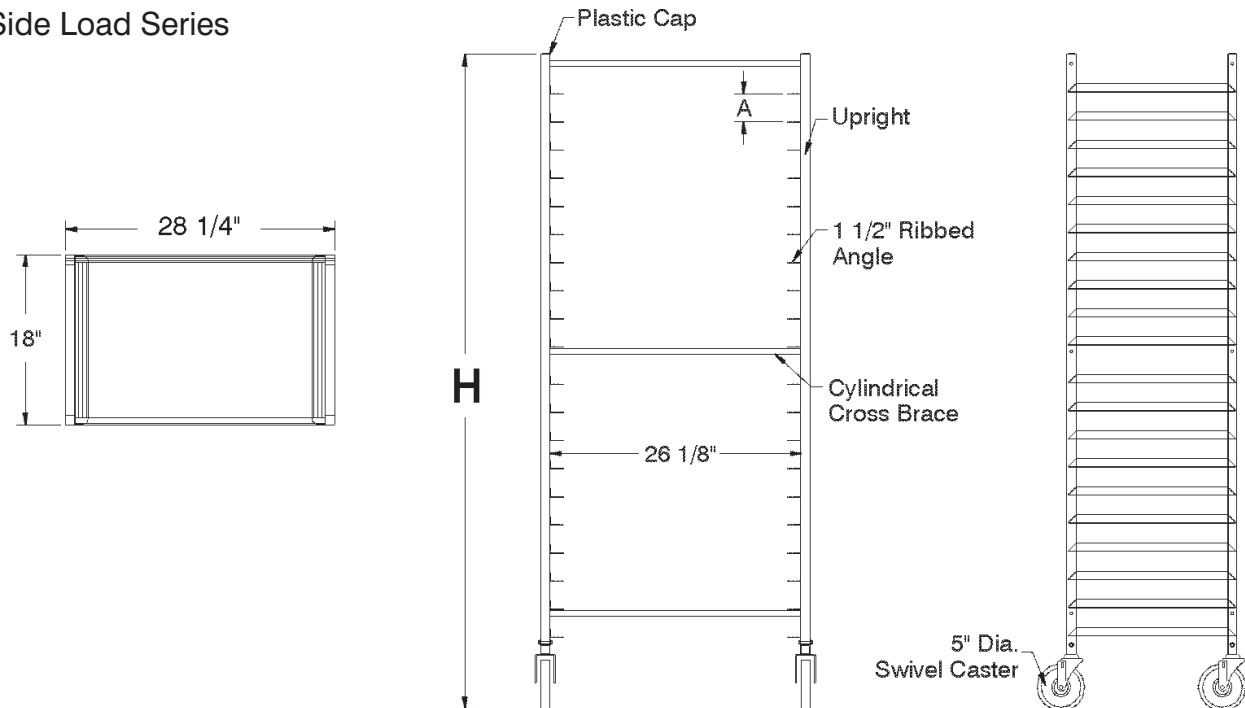

Direct Phone & Service: (516) 527-3309 • (888) 443-7014 • info@unisourcefoodequipment.com • unisourcefoodequipment.com
170 Wilbur Place, Suite 300, Bohemia, New York, 11716